# **NEW NAUTILUS EVO DOUBLE 38**



# **Technical data sheet NEW NAUTILUS EVO DOUBLE 38**

#### **1. DESCRIPTION**

Recycled PP formwork for the construction of light bi-directional slabs with flat intrados and large spans.



### 2. TECHNICAL SPECIFICATIONS

	-	Recycled polypropylene (PP) 97-99%		
Material	-	Additives 1-3%		
Percentage of recycled material	%	100		
Colour	-	Black		
Dimensions *	cm	52x52x H10+28		
Weight	kg	2.67 (± 10%)		
Lower spacer height	cm	0-5-6-7-8-9-10		
Upper spacer height	cm	0.8		
Formwork volume *	m³/pz	0.077		
Installation time (just plastic component)**	m <sup>2</sup> /h/worker	30		
Punching resistance	daN	190		
Fire resistance***	-	REI 180		
Place of production	-	Italy		

\* in consideration of the recycled material, the measures should be evaluated with a tolerance of  $\pm$  1,5%

\*\* The laying times of the complete slab are subject to considerable variations depending on the amount of reinforcement and the working conditions of the workers.

\*\*\*value referred to the UNI EN 1365-2 2002 and 1363 2012, carried out with standard sample with dimensions 2.98 x 7.33 m, thickness 28 cm and subjected to lasts solicitation moment of at least REI 180' with a minimum reinforcement covering of 30mm (EOTA).

#### **3. CONCRETE CONSUMPTION CHART**

Lower spacer height p	Higher spacer height d	Beam T	Interax i	Incidence of formworks	Concrete consumption up to the formwork's satin	Formwork volume	Concrete saving up to the formwork's satin*
[cm]	[cm]	[cm]	[cm]	[pz/m <sup>2</sup> ]	[m <sup>3</sup> /m <sup>2</sup> ]	[m³]	[m <sup>3</sup> /m <sup>2</sup> ]
0-5-6-7-8-9-10	0,8	12	64	2,44	0.192	0.077	0,188
0-5-6-7-8-9-10	0,8	14	66	2,30	0.203	0.077	0,177
0-5-6-7-8-9-10	0,8	16	68	2,16	0.214	0.077	0,166
0-5-6-7-8-9-10	0,8	18	70	2,16	0.223	0.077	0,157
0-5-6-7-8-9-10	0,8	20	72	1,93	0.231	0.077	0,149


may also be taken into account the concrete saving due to the lower weight of the building



**NEW NAUTILUS EVO DOUBLE 38** 

Technical data sheet Rev. 00 10/2018

## 4. TECHNICAL DRAWINGS

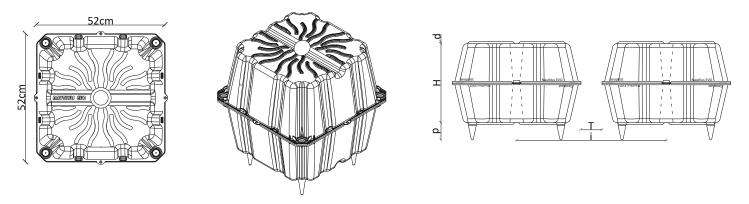

#### **5. TECHNICAL SUPPORT**

Geoplast Technical Unit is at the disposal of architects and engineers to offer the required assistance during the implementation of a project. From the statistical calculations to the working drawings.

- FEASIBILITY STUDY: Technical Analysis of the project which includes the choice of the most suitable product.
- <u>PRELIMINARY DESIGN</u>: Static analysis and preparation of documentation attesting to the reliability of the performance of the proposed system.
- <u>EXECUTIVE DESIGN AND ON-SITE ASSISTANCE</u>: Support of specialized designers. A detailed analysis with installation diagrams and/or on-site support can be provided on request.

Product code	-	ENNAEDH38XX	
Code composition	-	1 pcs NEW NAUTILUS EVO DOUBLE with spacers included 2 lateral spacers 10-20cm	
Lower spacer height	cm	0-5-6-7-8-9-10	
Packaging size	cm	110 x 120 x H250	
Type of packaging	-	Stacked and wrapped in plastic film on pallet	
Quantity per pallet	pz	220	
Package gross weight *	kg	605	

#### 6. PACKAGING AND TRANSPORT

\* weight may change by (± 10%)